

DTC Thermoplastic Premelters Have No Upgrades... Everything Comes Standard.

SUPERIOR SAFETY

Our **TPM-1000 & TPM-1500 Thermoplastic Premelters** have been designed with you and your crews in mind:

- Splash-resistant safety loading door
- UL rated over-temperature digital safety system. The temperature control box has a digital electronic thermostat for precise temperature control that features an over temperature safety switch and a redundant propane valve that activates if the material exceeds the safety switch setpoint
- Anti-splash wings on the dispensing chute provide extra safety for the operator when dispensing material from the tank to the applicator
- Stainless steel flame impingement plate
- Easy access sliding burner tray
- Full sweep agitator with auger standard
- Hardened heavy duty knife valve
- 100lb. (454kg.) LPG bottle holders
- 50 state EPA & CARB compliant engine

The powerful engine drives a hydraulic pump to turn the lid mounted, full sweep agitator. The four way valve allows the operator to activate the agitator clockwise or counter-clockwise (as desired) to provide homogenous heating and aid in a faster melt rate.

Made in the USA | One year limited warranty | Short lead time



**SIMPLE
DURABLE
ACCURATE**

sales@dispensingtech.com (800) 529-7733 Toll Free
390 Lombard Street (805) 388-5575 Office
Oxnard, CA 93030 (805) 388-5560 FAX

DISPENSINGTECH.COM

Trailer Mounted Thermoplastic Premelter Systems TPM-1000 & TPM-1500

Keep your focus on production and not on machine operation! Our versatile, heavy duty, premelters come standard with a wealth of safety features and accessories designed with you and your crews in mind.



**SIMPLE
DURABLE
ACCURATE**


Designed, fabricated, and assembled in the USA

Elevated deck at rear for optimal height of handliner loading

Fully insulated tank for rapid start-up and heat retention



Over temperature safety controller

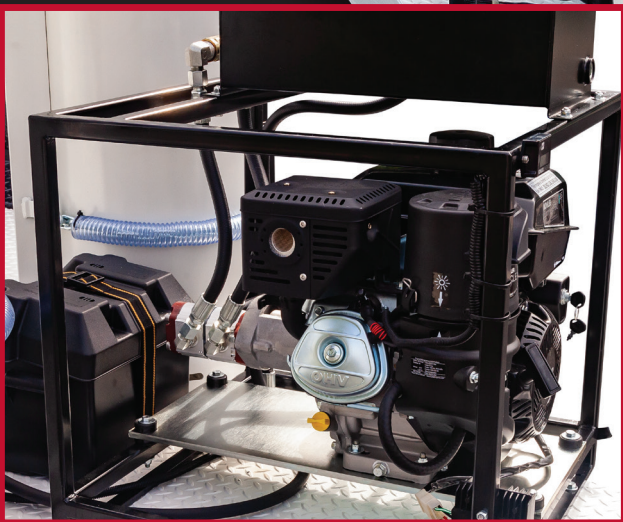

Powerful 9.5 hp Kohler engine certified for and meets both EPA & CARB regulations



Choose from a pintle or ball hitch



Deck loading rail swings open 180 degrees for ease of loading equipment and supplies

FEATURES & BENEFITS

Construction	14,000 GVWR dual axle trailer with all steel tread plate deck for slip resistance, 100% made in the USA
Dimensions	102" wide with a 16 foot bed length
Wheels & Brakes	8 lug heavy duty wheels and tires with electric brakes on all 4 wheels
Elevated Deck	28" maximum deck height. Elevated deck at rear for optimal height of handliner loading
Side Access Gate	Full access swing gate on curb side, swings open 180 degrees, for easy loading of materials and supplies
Hitch	Pintle or ball hitch (per customer specification)
Lights	LED tail, running, and side lights
Accessories	D-ring tie downs (8 ea.) supplied for customer mounting, 10 lb. fire extinguisher, heavy-duty, dual, ratcheting load binders to secure bottles

- Complete turnkey package, just add fuel and material and get to work!
- Single or dual configurations available for both models
- Meets or exceeds all federal highway regulations
- Alternate trailers and layouts available to suit customer requirements



Trailer shown with dual TPM-1500 premelter units, optional work lights, and beacons



Optional worklights and title 13 strobes